

PART LIST


NO.	DESCRIPTION	QTY.	
		Single Sol.	Double Sol.
1	Valve body	1	1
2	Spool	1	1
3	Shell	5	5
4	'O' ring (Cage)	6	6
5	'O' ring (Body)	4	4
6	Bush	2	2
7	Spring housing	1	--
8	Spring	1	--
9	Tube Assly.	1	2
10	Solenoid housing	1	2
11	M. O. pin	1	2
12	'O' ring for M. O. pin	1	2
13	'O' ring for tube assly.	1	2
14	Knob for plunger	1	2
15	'O' ring for plunger	1	2
16	Piston	1	2
17	'U' cup for piston	1	2
18	Plunger	1	2
19	'O' ring (Sol. housing)	1	2
20	Coil assembly	1	2
21	Sub base 'O' ring*	5	5
22	Sub base plate*	1	1
23	Washer	1	2

Seal kit consists of items 3, 4, 5, 12, 13, 15, 17, 19 & 21 (With sub base kit only) * For sub base valve only.


COIL SPECIFICATIONS

Type	Valve with (G50 - 8W) coil *
Tube Assly. construction	SS Plunger with NBR seals, SS magnet core assembled with brass adaptor.
Coil voltages	AC : 24, 42, 48, 110, 240, 440 V 50Hz DC : 12, 24, 48, 110, 240 V
Voltage range	+ 10% / -15%
Power consumption	AC : Pull 21 VA, Hold : 14 VA DC : 10 WATT
Duty cycle	100%
Class of insulation	F (Winding wire of class 'H' insulation)
Degree of protection	IP 65 - IS 2147 (Special coils available with flame-proof housing)
Cable connector	PG 11

* Modular spool valve is also offered with flame-proof coil duly certified by CMRS Dhanbad for grades I, IIA, IIB. Refer data sheet PMV-07 for details.


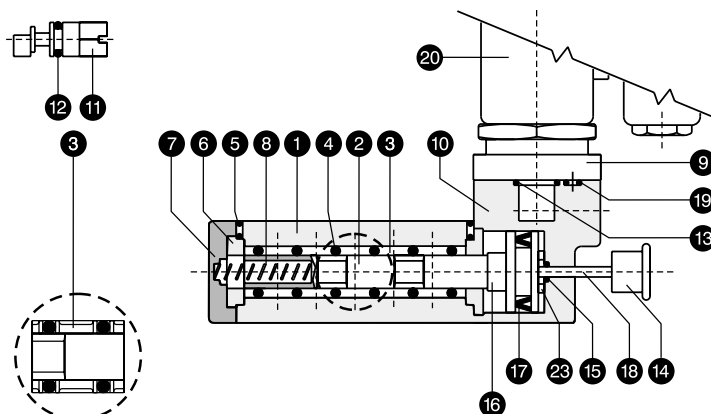


5/2 Single solenoid valve (Side ported design)

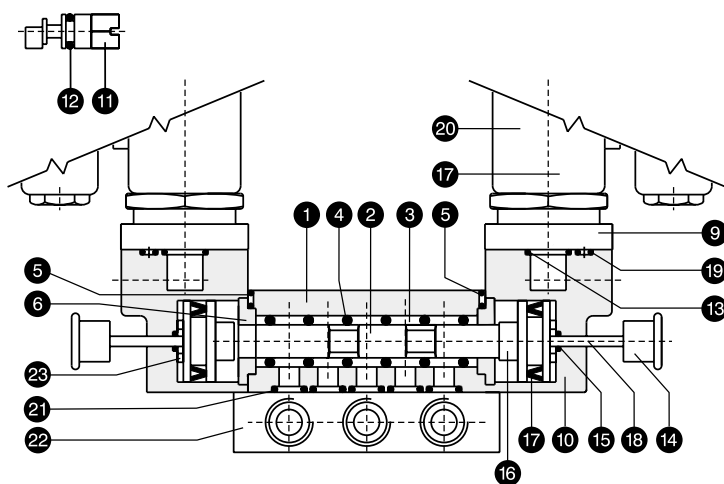


5/2 Double solenoid valve (Sub base design)

G 1/4 - 5/2 SINGLE SOLENOID MODULAR SPOOL VALVE

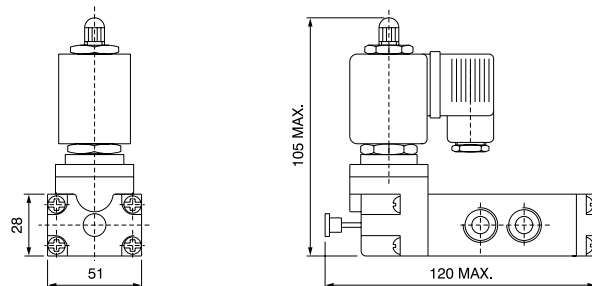

Side Ported Design

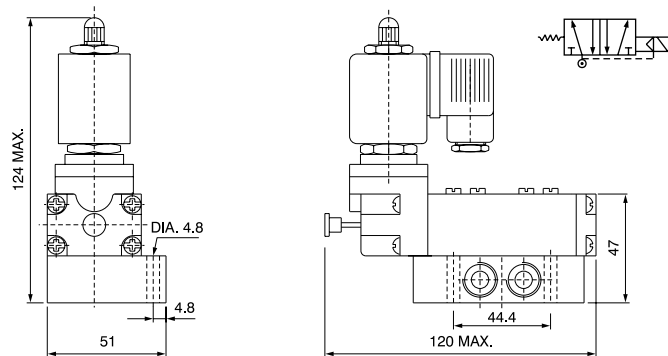

Sub Base Design



PART NOS.

	Side ported valve	Valve with sub base plate	Seal kit for side ported valve	Seal kit for sub base valve
Sol. operated Spring return	G 53014	G 53214	SK 53014	SK 53214
Base plate for Sub base valve	BS 14			


SPECIFICATIONS

Medium	Compressed air, Filtered
Design	Spool type with spring return
Working pressure	2.5 - 10 Bar
Ambient / fluid temp.	- 10° to 55° C
Cv (Nominal flow)	1.0 (1000 lit/min.)
Optional feature	PIC with light indicator External pilot actuation Manual override (screw type)
Response time at 5 Bar	On time : 10 ms. Off time : 35 ms.
Materials	Body : Aluminium Seals : NBR

G1/4 - 5/2 DOUBLE SOLENOID MODULAR SPOOL VALVE

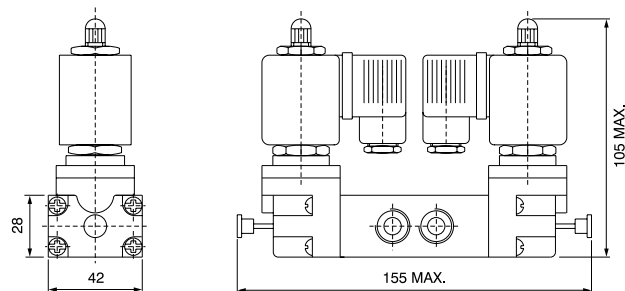

Side Ported Design

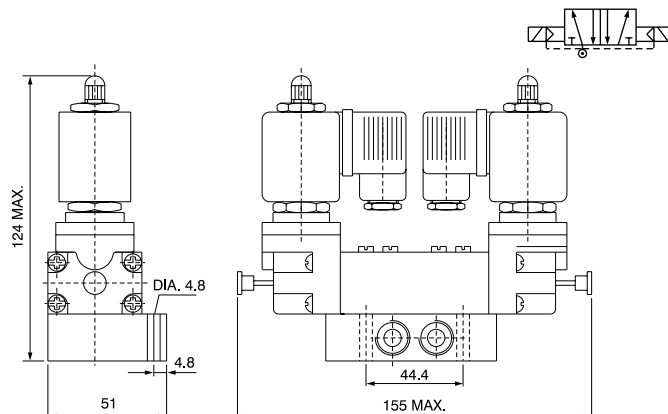

Sub Base Design

PART NOS.

	Side ported valve	Valve with sub base plate	Seal kit for side ported valve	Seal kit for sub base valve
Sol. operated	G 53204	G 53224	SK 53204	SK 53224
Base plate for Sub base valve	BS 14			

SPECIFICATIONS

Medium	Compressed air, Filtered
Design	Spool type
Working pressure	1.5 - 10 Bar
Ambient / fluid temp.	- 10° to 85° C
Cv (Nominal flow)	1.0 (1000 lit/min.)
Optional feature	PIC with light indicator External pilot actuation Manual override (screw type)
Response time at 5 Bar	On time : 10 ms.
Materials	Body : Aluminium Seals : NBR